

# BUILDING / DRYWALL REINFORCEMENT MATERIALS

WWW.GALAXY-FIBER.COM

86-21-66037922  
86-21-66037926

info@galaxy-fiber.com  
sales@galaxy-fiber.com

WWW.GALAXY-FIBER.COM  
WWW.GALAXYFIBER.CN

ADD: 1#, 111Lane, Luxiang Road,  
Baoshan District, 201907, Shanghai, China



# GALAXYFIBER

GALAXYFIBER is the brand of Shanghai Galaxyfiber Industry Co.,Ltd, established in 2002, GALAXYFIBER INDUSTRY is a professional manufacturer and exporter that is concerned with the design, development and production of building reinforcement materials, decoration products, tools, accessories, industry textile fabric.

Like drywall joint tape, fiberglass mesh, window screen, sanding sponge, wall patch, corner bead, fire blanket and so on..

Our headoffice and main warehouse located in Shanghai, with quick service and convenient transportation access. All of our products comply with international quality standards and are greatly appreciated in a variety of different markets throughout the world. Our well-equipped facilities and excellent quality control throughout all stages of production enables us to guarantee high level customer satisfaction.

For now, we have passed the quality system certification and product system certification, like FSC, REACH, ROHS, PAHS etc.. and have a long term cooperative relationship with SGS, TUV, BV etc..

As a result of our high quality products and outstanding customer service, we have gained a global sales network reaching United States, Canada, Europe, South America, Australia, South East Asia and Middle East. If you are interested in any of our products or would like to discuss a custom order, please feel free to contact us. We are looking forward to forming successful business relationships with you in the near future.



## INNOVATING EVERYDAY

Innovation has been at the heart and soul of our business since the company was founded. Our progress is built on always challenging the tradition technology with new ways of thinking. That's why we have been walking at the forefront of the industry, continue to provide the best solution of building reinforcement.

ADD:1#,111Lane,  
Luxiang Road,Baoshan  
District,201907,  
Shanghai,China

TEL:  
86-21-66037922  
66037926

FAX:86-21-66037922

MOB/WHATSAPP:  
+86-18721503790

EMAIL(Office):  
info@galaxy-fiber.com

EMAIL(Sales):  
sales@galaxy-fiber.com  
Lucas@galaxy-fiber.com

WWW.GALAXY-FIBER.COM  
WWW.GALAXYFIBER.CN



银河纤维®

GFIBER®

GALAXYFIBER®



*Premium products  
Made by Galaxyfiber*



# Mesh

Alkaline - resistance  
Soft/standard/hard mesh  
20mm - 2400mm  
30g/㎡ - 600g/㎡



## EIFS MESH



### Product introduction

The product has high strength and good alkali resistance, and plays an important structural role in the insulation system. Due to its excellent corrosion resistance and the high tensile strength, the stress on the external wall insulation system can be evenly dispersed, avoid the entire thermal insulation structure shape changed caused by external impact.The deformation makes the insulation layer have high impact strength and is easy to construction.

| Item No.       | Density Count/25mm |      | Area Weight (g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Content Of Resin%( > ) |
|----------------|--------------------|------|--------------------|---------------------------|------|-----------------|------------------------|
|                | Warp               | Weft |                    | Warp                      | Weft |                 |                        |
| GF-2.5×2.5-110 | 2.5                | 2.5  | 110                | 1200                      | 1000 | leno            | 18                     |
| GF-2.5×2.5-125 | 2.5                | 2.5  | 125                | 1200                      | 1400 | leno            | 18                     |
| GF-5×5-75      | 5                  | 5    | 75                 | 800                       | 800  | leno            | 18                     |
| GF-5×5-125     | 5                  | 5    | 125                | 1200                      | 1300 | leno            | 18                     |
| GF-5×5-145     | 5                  | 5    | 145                | 1400                      | 1500 | leno            | 18                     |
| GF-4×4-160     | 4                  | 4    | 160                | 1550                      | 1650 | leno            | 18                     |
| GF-5×5-160     | 5                  | 5    | 160                | 1450                      | 1600 | leno            | 18                     |

### Product characteristics

- High strength
- Excellent corrosion resistance
- Heat insulation, anti-cracking



## MESH FOR MARBLE / MOSAIC


### Product introduction

Fiberglass marble mesh can reinforce and protect stones because of its strength and balance structure, it can spread the stress equally. And it is easy to be stucked in the back of marble, mosaic and stone, it is ideal reinforcement for all stone processing factories.

| Item No.   | Density Count/25mm |      | Area Weight (g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Content Of Resin%( > ) |
|------------|--------------------|------|--------------------|---------------------------|------|-----------------|------------------------|
|            | Warp               | Weft |                    | Warp                      | Weft |                 |                        |
| GF-5×5-75  | 5                  | 5    | 75                 | 800                       | 800  | Leno            | 18                     |
| GF-9×7-55  | 9                  | 7    | 55                 | 600                       | 550  | Leno            | 18                     |
| GF-9×7-75  | 9                  | 7    | 75                 | 600                       | 800  | Leno            | 18                     |
| GF-5×5-145 | 5                  | 5    | 145                | 1250                      | 1700 | Leno            | 18                     |
| GF-5×5-160 | 5                  | 5    | 160                | 1450                      | 1650 | Leno            | 18                     |
| GF-6×5-80  | 6                  | 5    | 80                 | 700                       | 900  | Leno            | 14                     |

### Product characteristics

- High strength, light weight, prevent cracking
- Heat resistance, excellent corrosion resistance
- Low elongation, flexible, fit well high strength

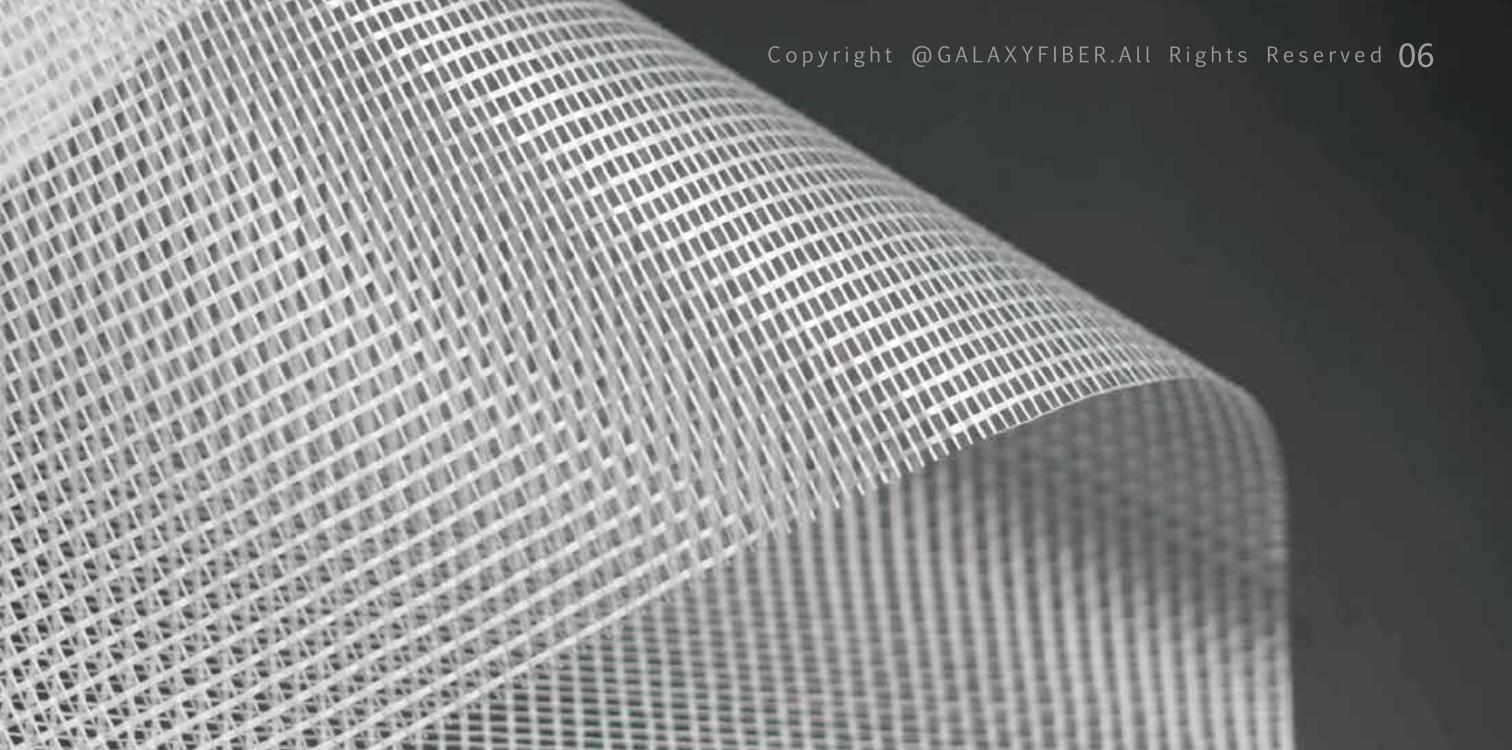

## MESH FOR WATERPROOF / ROOFING

### Product introduction

Fiberglass waterproof mesh has excellent waterproof performance. As a substrate for bitumen or cement is used in the field of waterproofing. The waterproof mesh produced by our company is based on uniform mesh hole structure and tensile strength, it can maintain the stability of the waterproof layer structure and avoid cracks and has excellent anti-corrosion and structural properties! It is an excellent choice for waterproofing.

| Item No.    | Density Count/25mm |      | Area Weight (g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Content Of Resin%( > ) |
|-------------|--------------------|------|--------------------|---------------------------|------|-----------------|------------------------|
|             | Warp               | Weft |                    | Warp                      | Weft |                 |                        |
| GF-20×20-45 | 20                 | 10   | 45                 | 550                       | 550  | Plain           | 14                     |
| GF-20×10-60 | 20                 | 10   | 60                 | 660                       | 660  | Plain           | 14                     |
| GF-20×10-75 | 20                 | 10   | 75                 | 660                       | 660  | Plain           | 14                     |
| GF-20×20-60 | 20                 | 20   | 60                 | 660                       | 660  | Plain           | 14                     |
| GF-20×20-80 | 20                 | 20   | 80                 | 800                       | 800  | Plain           | 14                     |

### Product characteristics

- High strength, prevent cracking
- Easy of application, long service life
- Excellent corrosion resistance, waterproof



# Mesh

## Packaging And Storage

Each roll is wrapped up in plastic film and then packed in a cardboard box. The carton are stacked vertically onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry, water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

## MESH FOR PITCH / COURT / FLOOR

### Product introduction

Floor(sport pitch, court, and wood) use fiberglass mesh has the characteristics of light weight, high stability, high strength, ultrathin,high flatness and strong weather resistance.It is widely used in floor reinforcement, ground insulation, as a base material for construction and repair. Our mesh is by special treated, special use for outdoor court & indoor floor. Soft, strong and fits. It is an ideal engineering material in surfacing of land.

| Item No.    | Density Count/25mm |      | Area Weight (g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Content Of Resin%( > ) |
|-------------|--------------------|------|--------------------|---------------------------|------|-----------------|------------------------|
|             | Warp               | Weft |                    | Warp                      | Weft |                 |                        |
| GF-20x10-60 | 20                 | 10   | 60                 | 660                       | 660  | Plain           | 12                     |
| GF-20x10-75 | 20                 | 10   | 75                 | 660                       | 660  | Plain           | 12                     |
| GF-5x5-75   | 5                  | 5    | 75                 | 800                       | 800  | Leno            | 18                     |
| GF-5x5-125  | 5                  | 5    | 125                | 1200                      | 1300 | Leno            | 18                     |

### Product characteristics

- Corrosion resistant
- Excellent tensile strength
- Smooth surface appearance of finish



# DRYWALL JOINT TAPE



PRO 65

8×8/inch,9×9/inch,  
12×12/inch,20×10/inch  
50mm-1240mm  
50g/m<sup>2</sup>-110g/m<sup>2</sup>



# FIBERGLASS SELF-ADHESIVE TAPE



## Product introduction

Fiberglass self-adhesive mesh tape is a self adhesive, high tensile strength tape. Special adhesive coating allows drywall tape to outperform other joint sealing methods, particularly in areas of high humidity. Perfect for joints, cracks, and holes on a variety of surfaces including smooth and unevenly coated surfaces. Widely used in gypsum board, cement board, drywall and eps joint and reinforcement.

| Item No.      | Density Count/25mm |      | Area Weight (g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Content Of Resin%( > ) |
|---------------|--------------------|------|--------------------|---------------------------|------|-----------------|------------------------|
|               | Warp               | Weft |                    | Warp                      | Weft |                 |                        |
| GF-FT8×8-50   | 8                  | 8    | 50                 | 550                       | 450  | leno            | 28                     |
| GF-FT8×8-60   | 8                  | 8    | 60                 | 550                       | 500  | leno            | 28                     |
| GF-FT9×9-65   | 9                  | 9    | 65                 | 550                       | 550  | leno            | 28                     |
| GF-FT9×9-70   | 9                  | 9    | 70                 | 550                       | 600  | leno            | 28                     |
| GF-FT9×9-75   | 9                  | 9    | 75                 | 700                       | 700  | leno            | 28                     |
| GF-FT9×9-105  | 9                  | 9    | 110                | 800                       | 800  | leno            | 30                     |
| GF-FT20×10-75 | 20                 | 10   | 75                 | 650                       | 850  | Plain           | 28                     |

## Product characteristics

- Strong fiberglass mesh strengthens joints
- Full assortment of roll sizes, styles, and colors
- For use with setting-type joint compounds and plaster
- Alkali resistant
- Mesh design eliminates bubbles and blisters

## Packaging and storage

Each roll is wrapped up in shrink film and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area it is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.



- Import materials.
- En13963.
- White color/light yellow color.
- Customized core / label / box.
- Variety size.



PAPER TAPE

Laser hole/needle hole  
50mm/52mm  
23m/30m/50m/75m  
/90m/100m/150m

PAPER JOINT TAPE



Product introduction

The drywall paper joint tape widely used in various construction scenes, with high tensile strength resists tearing and distortion, the roughened surface ensures a strong bond and features a positive crease that simplifies the corner finishing. Mainly used for gypsum board joints and corners joints. Enhance the crack resistance and elongation of the wall, easy to construction.

Drywall joint water-activated paper tape is another high-performance drywall tape, creatively using water-activated glue, without any extra compound. Drywall joints can be dry and sealed within an hour.

| Item No.        | Roll Size (mm) |        | Area Weight (g/m2) | Material          | 1 Ctn/Rolls | Ctn Size   | N.W./Ctn(kg) | G.W./Ctn(kg) |
|-----------------|----------------|--------|--------------------|-------------------|-------------|------------|--------------|--------------|
|                 | Width          | Length |                    |                   |             |            |              |              |
| GF-PT-50/52-23  | 50/52mm        | 23m    | 145±5              | Paper Pulp        | 100         | 59×59×23cm | 17.5         | 18           |
| GF-PT-50/52-30  | 50/52mm        | 30m    | 145±5              | Paper Pulp        | 100         | 59×59×23cm | 21           | 21.5         |
| GF-PT-50/52-50  | 50/52mm        | 50m    | 145±5              | Paper Pulp        | 20          | 30×30×27cm | 7            | 7.3          |
| GF-PT-50/52-75  | 50/52mm        | 75m    | 145±5              | Paper Pulp        | 20          | 33×33×27cm | 10.5         | 11           |
| GF-PT-50/52-90  | 50/52mm        | 90m    | 145±5              | Paper Pulp        | 20          | 36×36×27cm | 12.6         | 13           |
| GF-PT-50/52-100 | 50/52mm        | 100m   | 145±5              | Paper Pulp        | 20          | 36×36×27cm | 14           | 14.5         |
| GF-PT-50/52-150 | 50/52mm        | 150m   | 145±5              | Paper Pulp        | 10          | 43×22×27cm | 10.5         | 11           |
| GF-PT-WA        | 50/52mm        | 75mm   | 200±10             | Paper Pulp/Lyosol | —           | —          | —            | —            |
| GF-PT-WA        | 50/52mm        | 150mm  | 200±10             | Paper Pulp/Lyosol | —           | —          | —            | —            |

Product characteristics

- High tensile strength
- Laser hole / needle hole
- Resists cracking, stretching, wrinkling and tearing
- Lightly sanded for increased bond
- Features a positive center crease that simplifies corner applications

Packaging and storage

Each roll is wrapped up in shrink film and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

CORNER

METAL CORNER TAPE

- / Galvanized steel
- / Aluminum
- / Aluminized zinc
- / Pvc



30m/50m  
50mm/52mm

METAL CORNER TAPE



Product introduction

The metal corner tape is made of a strong paper joint tape reinforced by two parallel corrosion resistant metal/pvc strips, and is the ideal solution when dry lining and plastering archways, curved and irregular inside and outside corners, and unusual angles. High strength metal and paper can protect the corner surface from the impact, with excellent structural properties and corrosion resistance.

| Item No.        | Metal Corner Tape | Item No.        | Metal Corner Tape |
|-----------------|-------------------|-----------------|-------------------|
| Metal Type      | Galvanized Steel  | Metal Type      | Aluminum          |
| Zinc Plate      | 12-18µm           | Zinc Plate      | 12-18µm           |
| Metal Thickness | 0.24-0.29mm       | Metal Thickness | 0.24-0.29mm       |
| Paper Thickness | 210-230µm         | Paper Thickness | 210-230µm         |
| Standard Width  | 5cm               | Standard Width  | 5cm               |
| Standard Length | 30m               | Standard Length | 30m               |
| Weight          | 1600g/pc          | Weight          | 800g/pc           |

Product characteristics

- Excellent tensile strength
- Customized packaged (white or colorful case)
- Single roll pack, easy cut and application
- Galvanized or aluminum, anti-corrosion and rust-proof

Packaging and storage

Each roll is wrapped up in inner paper box and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.



Product characteristics

- High strength, light weight, prevent cracking
- Heat resistance, excellent corrosion resistance
- Low elongation, flexible and good conformability



TISSUE TAPE



Product introduction

Fiberglass tissue tape mainly used as substrates for water-proof roofing materials and joint materials. It is characterized by high tensile strength, corrosion resistance, dimensional stability, water resistance, high porosity and easy composite by bitumen and joint compound.

| Item No. | Area Weight (g/m <sup>2</sup> ) | Moisture Content(%) | Binder Content(%) | Wetting Time(%) | Tensile Strength MD(N/5cm) |
|----------|---------------------------------|---------------------|-------------------|-----------------|----------------------------|
| GF-S-TT  | 45                              | ≤0.2                | 6                 | 15              | ≤25                        |
| GF-S-TT  | 60                              | ≤0.2                | 6                 | 20              | ≤30                        |

Product characteristics

- Corrosion resistant
- Excellent tensile strength
- Smooth surface appearance of finish

Packaging and storage

Each roll is wrapped up in shrink film and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area it is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

# FIBERGLASS BLACK TISSUE



## Product introduction

Black fiberglass tissue (membrane, felt) is made of glass fiber through wet forming process, which is a green and environmentally friendly material. It maintains excellent sound insulation, fire resistance, corrosion resistance, mildew resistance, impact resistance, orange peel resistance, crack resistance, washing resistance and breathability.. (Other colors can be customized, such as yellow, red, blue, green, etc.)

| Item    | G/M2 | Binder Content % | MD(N/50mm) | CD(N/50mm) |
|---------|------|------------------|------------|------------|
| GF-RM50 | 50±3 | 20±2             | ≥175       | ≥105       |
| GF-RM60 | 60±3 | 18±2             | ≥180       | ≥120       |

- Environmentally friendly flame retardant binders
- Good color fixation, soft hand feeling, and even fiber dispersion
- Corrosion-resistant, flame retardant, and well abrasion-resistant
- Features noise and sound reduction, heat insulation, waterproof, oil-proof, dirt-proof performance

## Product characteristics

Environmentally friendly flame retardant binders  
Good color fixation, soft hand feeling, and even fiber dispersion  
Orrosion-resistant, flame retardant, and well abrasion-resistant  
Features noise and sound reduction, heat insulation, waterproof, oil-proof, dirt-proof performance

**(OTHER COLORS CAN BE CUSTOMIZED, SUCH AS YELLOW, RED, BLUE, GREEN, ETC.)**

## PAPER FACED METAL CORNER BEAD & TRIM

Multi-type suitable for different wall types

Protects and decorates wall durably


Impact resistant, anti-bumping

Easy application




90° BEAD OUTSIDE CORNER

CORNER BEAD / P-01

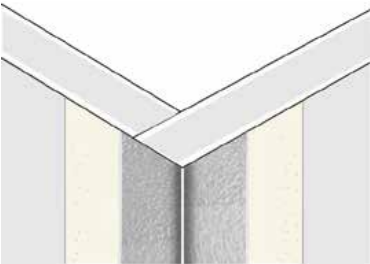

Suitable for use on any thickness of wallboard, easy to install on all cut edges. Paper-faced metal corner bead provide superior resistance to edge cracking and chipping for a look that stays beautiful despite the stresses of normal building movement and everyday wear and tear, that its beads and trims will not edge crack for the lifetime of the structure.

| Style  | A    | B    | C    | D    |
|--------|------|------|------|------|
| GF-P01 | 20mm | 25mm | 25mm | 20mm |
| GF-P02 | 24mm | 21mm | 13mm | 22mm |

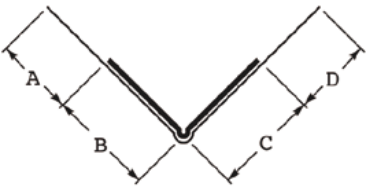

BULLNOSE

BULLNOSE / B-01




Bullnose beads are used to finish outside corners exceeding 120°. The rigid steel-reinforced corner is covered with a unique, high strength paper providing maximum strength and protection while preventing cracking caused by the movement or shrinkage of framing members. Installed by pressing firmly into joint compound and removing excess compound with a drywall knife or clean rag.

| Style  | A    | B    | C    | Angle |
|--------|------|------|------|-------|
| GF-B01 | 22mm | 20mm | 20mm | 90°   |
| GF-B02 | 25mm | 20mm | 25mm | 135°  |




L-TRIMS

L-TRIMS / L-01

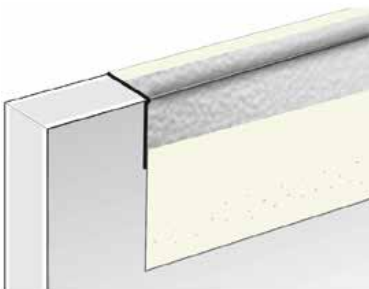

L-trims is ideal where wallboard abuts with suspended ceilings, plaster, masonry and concrete walls, as well as untrimmed door and window jambs. The rigid steel-reinforced corner is covered with a unique, high strength paper providing maximum strength and protection while preventing cracking caused by the movement or shrinkage of framing members. The Installation does not require fasteners or nails, and specially designed paper provides excellent grouting and paint adhesion.

| Style  | A    | B    | C    |
|--------|------|------|------|
| GF-L01 | 15mm | 23mm | 29mm |
| GF-L02 | 15mm | 15mm | 25mm |

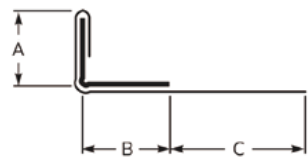


J-TRIMS

J-TRIMS / J-01



Tape-on “j”-shaped trim completely surrounds the rough edge of the wallboard, providing a strong and clean corner. Tape-on application eliminates frustration with nailing and nail shrink back. Can be used for finishing off bifold closet doors, as well as under all door and window encasements, and to finish rough drywall ends.

| Style  | A    | B    | C    | D    |
|--------|------|------|------|------|
| GF-J01 | 12mm | 15mm | 15mm | 30mm |
| GF-J02 | 10mm | 15mm | 15mm | 30mm |

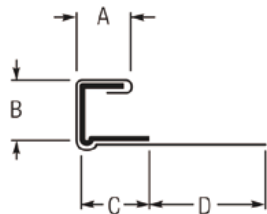



# CORNER BEAD PVC/METAL

PVC / Metal

20×20mm/23×23mm/25×25mm

2.1m/2.4m/2.7m/3.0m



## CORNER BEAD (PVC/METAL)



### Product introduction

Drywall corner bead provides superior corrosion protection and mud adhesion. This product features a hot-dipped galvanized surface coating (metal corner bead) or high purity pvc plastic (with fiberglass mesh) which provides the finest rust protection. Using the corner beads, do not need to use steel panel, also can enhance the construction efficiency two to five times, reduce the construction cost, and guarantee the beauty and firmness of corner.

| Item No.                         | Materials                         | Wing Size<br>Metal/PVC | Paper/Mesh | Length/Pcs                 | Thinkness              | Quantity<br>Pcs/Carton |
|----------------------------------|-----------------------------------|------------------------|------------|----------------------------|------------------------|------------------------|
| Metal Corner Bead                | Galvanized Steel                  | 20mm, 25mm<br>30mm     | -          | 2.1m , 2.4m<br>2.7m , 3.0m | 0.2mm , 0.3mm<br>0.4mm | 50Pcs                  |
| Paper Faced Metal<br>Corner Bead | Galvanized Steel +<br>Kraft Paper | 20mm, 25mm<br>30mm     | 40mm       | 2.1m , 2.4m<br>2.7m , 3.0m | 0.2mm , 0.3mm<br>0.4mm | 50Pcs                  |
| PVC Corner Bead                  | PVC                               | 20mm, 25mm<br>30mm     | -          | 2.1m , 2.4m<br>2.7m , 3.0m | 0.2mm , 0.3mm<br>0.4mm | 50Pcs                  |
| PVC MESH<br>Corner Bead          | PVC + Fiberglass<br>Mesh          | 20mm, 25mm<br>30mm     | 100mm      | 2.1m , 2.4m<br>2.7m , 3.0m | 0.2mm , 0.3mm<br>0.4mm | 50Pcs                  |

### Product characteristics

- Protects and decorates wall durably
- Multi-type suitable for different wall types
- Impact resistant, anti-bumping
- Easy application

### Packaging and storage

Each roll is wrapped up in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport.

Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.




- Corners will not dent
- Will not separate from wall
- Protects and decorates wall durably

## VINYL TEAR AWAY L STRIP CORNER BEAD



### Product introduction


Vinyl tear away L strip corner bead is designed to finish edges where drywall terminates at other substrates or building components such as windows and doors, it's tear-off strip serves as a protective mask to create clean finished edges. Tear off strip acts as a guide for the taping knife as well as a protective masking for mudding and painting. When finished, simply tear off the strip for a clean, sharp look.

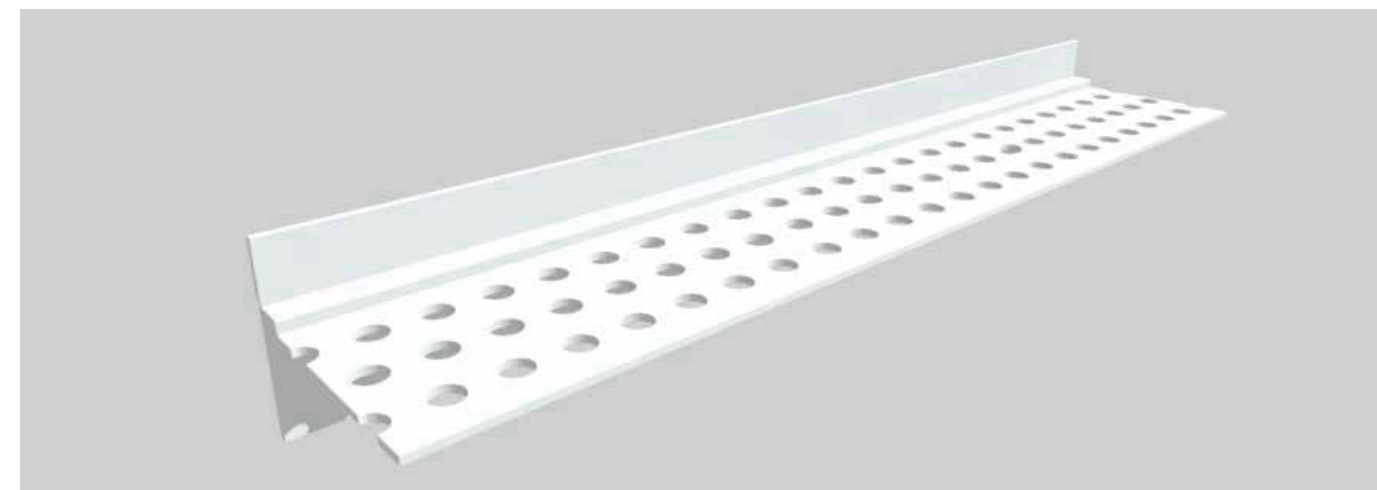

### Packaging and storage


Each roll is wrapped up in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport.

Unless otherwise specified, product should be stored in a cool, dry, water-proof area. It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

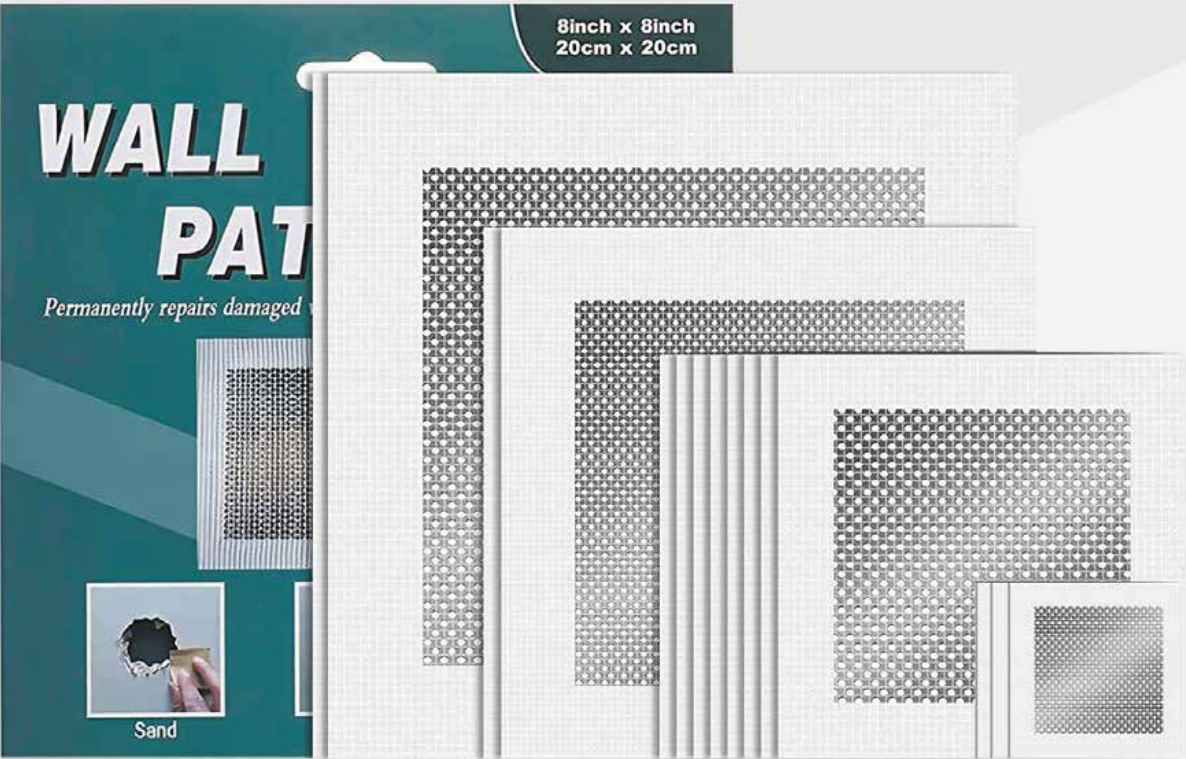

# WALL PATCH

Repair wall patch  
Aluminum/metal/pvc

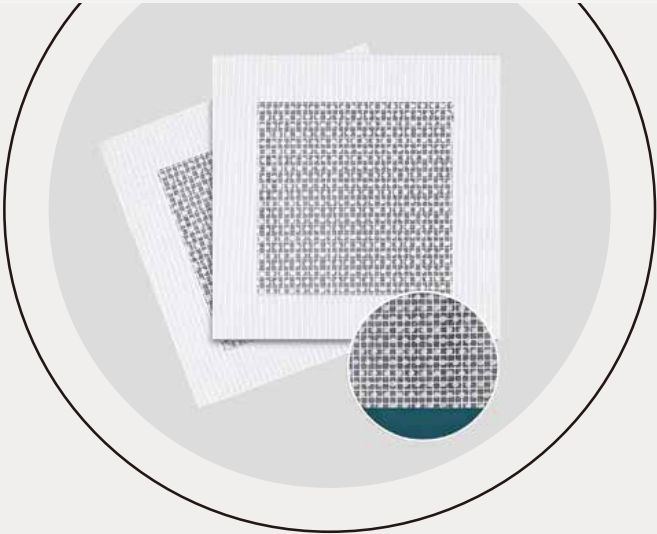

## Product introduction

Wall patch is a compound material which can permanently repair anywhere damaged walls and ceilings. It is self-adhesive, extra thin and strong and easy to construction. The repaired surface is smooth, beautiful, no cracks and no difference with the original walls after repairing. Aluminum and galvanized materials can be choose, customized packaged is available.

# WALL PATCH



| Base Material                   | Regular Size    |
|---------------------------------|-----------------|
| Fiberglass Patch+Aluminum Sheet | 2×2 " (5×5cm)   |
|                                 | 4×4 " (10×10cm) |
| Fiberglass Patch+Zinc Steel     | 6×6 " (15×15cm) |
|                                 | 8×8 " (20×20cm) |

## Product characteristics

- Excellent tensile strength
- Customized packaged (white or colorful case)
- Single piece pack, easy application
- Galvanized or aluminum, anti-corrosion and rust-proof

## Packaging and storage

Each piece is wrapped up in paper packet and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

# PUTTY KNIFE



## Product introduction

The plastic putty knife is made of lightweight and high-strength plastic particles, ergonomically designed, easy to grasp, suitable for construction, daily use, etc. As an auxiliary tool, the cost is low, the efficiency is high, and it is a very widely used daily tool . customized packaged is available.

| Specification | Box Size   | Quantity/Box | N.W.(kg) | G.W.(kg) |
|---------------|------------|--------------|----------|----------|
| 2"            | 39x32x33cm | 960pcs       | 16       | 17       |
| 4"            | 39x36x25cm | 480pcs       | 12       | 13       |
| 6"            | 42x26x58cm | 480pcs       | 17       | 18       |

## Product characteristics

- Excellent Tensile Strength
  - Single Piece Pack, Easy Application
- Customized Packaged (White or Colorful Case)
  - Galvanized or Aluminum, Anti-Corrosion and Rust-Proof

# MUD PAN



## Product introduction

Stainless steel mud pan holds drywall mud or other plaster materials. strong heli-arc welds create a sturdy long-lasting pan that stands up to lots of use. The tight weld prevents oxidation and creates a smooth interior seam to prevent build-up of material. tapered ends and sides allow taping knives up to easily fit for fast and smooth movements on the jobsite.

| Specification                                | Box Size   | Quantity/Box | N.W.(kg) | G.W.(kg) |
|----------------------------------------------|------------|--------------|----------|----------|
| STAINLESS STEEL HELI-ARC WELDED MUD PAN 12IN | 39x38x19cm | 30pcs        | 16.2     | 17.4     |
| STAINLESS STEEL HELI-ARC WELDED MUD PAN 14IN | 43x39x19cm | 30pcs        | 18       | 19.2     |

## Product characteristics

- Easy to clean
  - Welds for a strong hold
- Smooth corners prevent build-up
  - Stainless steel for a long wear life and corrosion resistance



## DRYWALL TAPE HOLDER

Size:

26.7cm X 7.8cm X 2.5cm

Weight: 330g



## DRYWALL TAPE HOLDER



### Product introduction

The product is all steel structure, after electroplating treatment can prevent rust, increase service life. It is suitable for seam paper tape (including 152m) glass fiber mesh tape and metal angle guard tape, etc. The operation is simple. Drywall tape holder is hooked on the belt to facilitate the pulling and disassembly of the paper tape.

### Product characteristics


- Rust prevention design
- Rapid disassembly and installation

### Packaging and storage

Packaging: conventional packing carton packing.

Storage: in the absence of special requirements, drywall tape holder should be stored in dry, cool places to prevent moisture, drywall tape holder should always be kept in the original packaging before use. It is suggested that the indoor temperature should be kept in balance. The optimum storage conditions are 15-35 c and 35-65% humidity. In order to ensure safety and avoid damage to products, pallet stacking height should not exceed three layers. When stacking two or three storeys, it is necessary to move the upper tray correctly and smoothly. When in use, it should be placed in the production workshop 24 hours in advance for conditioning.

# SPONGE SAND BLOCK

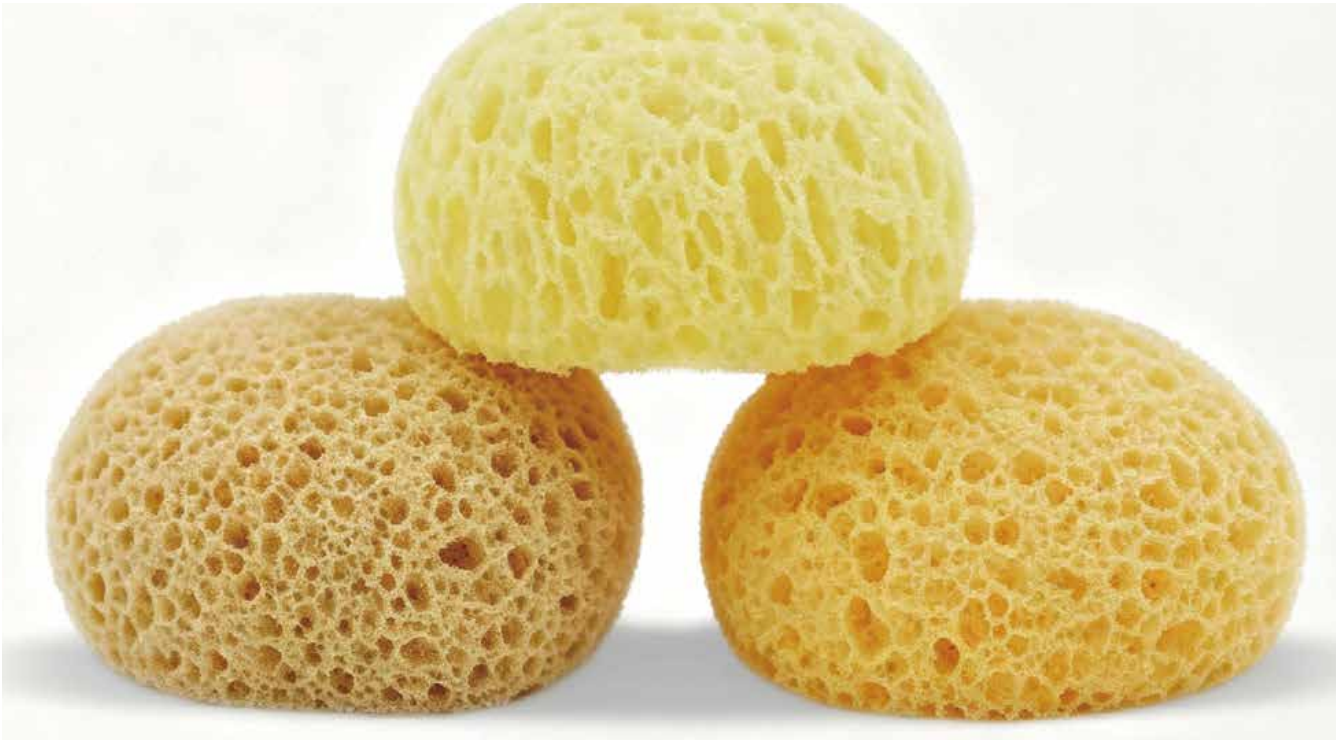

## Product introduction

Easy to hold and long lasting, material is soft and absorbent shipped compressed to save space, sponges expand with water or exposure to air. Also great for applying paint in household or craft projects to workspace cleanup to washing dishes. Excellent sanding performance and longevity, meets customers different grinding needs. Simply rinse and reuse.

| COLOR        | Size         | Weight(g) |
|--------------|--------------|-----------|
| Light Yellow | 115x95x70mm  | 10        |
| Yellow       | 135x115x70mm | 10        |
| Coffee       | 115x95x70mm  | 10        |

## Product Characteristics

- Professional-grade foam keeps its shape for lasting use
- Premium mineral grits for effective hand sanding
- Suitable for wet sanding or dry sanding
- Sanding sponge will not discolor the surface you are sanding

# SPONGE SAND BLOCK



## Product introduction

Sanding sponges are designed for sanding wood, paint, metal, plastic or drywall. This sponge features conventional abrasives and is made with durable, flexible foam. The block shape makes it easy to hold and sands flat, contoured, or irregular surfaces. Sanding is an integral step in preparing a surface to receive a coating.

## Product characteristics

- Grit will not fade away, can be used repeatedly
- Has good elasticity and certain hardness, will not scratch the workpiece
- Can be used on metal, wood, plastic, paint & drywall
- Either dry grinding or wet grinding, can be cleaned, can reused

## Packaging and storage

Each piece is wrapped up in paper parket and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.



- Easy to clean
- Welds for a strong hold
- Smooth corners prevent build-up

# ACCESS PANEL



## Product introduction

It is a kind of inspection hole that is required in places such as central air-conditioning pipes, wire pipes, toilet water supply and drainage pipes during the decoration process (technicians use it to inspect the internal pipes of the ceiling or the inspection holes of tiles and gypsum board walls or called manholes, access door, inspection hole).

| ACCESS PANEL | W (outline width) | L (outline length) | A hole (long) | B opening (wide) | C (long side) | D (wide side) | Product height |
|--------------|-------------------|--------------------|---------------|------------------|---------------|---------------|----------------|
| GF-100X150   | 130               | 180                | 100           | 150              | 15            | 15            | 21             |
| GF-150X150   | 180               | 180                | 150           | 150              | 15            | 15            | 21             |
| GF-150X200   | 180               | 230                | 145           | 195              | 17.5          | 17.5          | 21             |
| GF-150X230   | 180               | 260                | 150           | 230              | 15            | 15            | 21             |
| GF-170X170   | 200               | 200                | 170           | 170              | 15            | 15            | 7              |
| GF-200X200   | 245               | 245                | 200           | 200              | 22.5          | 22.5          | 21             |
| GF-300X300   | 350               | 350                | 300           | 300              | 25            | 25            | 21             |
| GF-350X350   | 410               | 410                | 350           | 350              | 30            | 30            | 21             |
| GF-400X400   | 440               | 440                | 395           | 395              | 22.5          | 22.5          | 28             |
| GF-450X450   | 510               | 510                | 450           | 450              | 30            | 30            | 21             |
| GF-550X550   | 620               | 620                | 550           | 550              | 35            | 35            | 21             |

## Packaging and storage

Each roll is wrapped up in plastic film and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

# SCREEN


PVC/Polyester/PP



14×14/inch, 18×16/inch  
20×20/inch,22×22/inch  
50mm-3300mm  
45g-160g/m²



# INSECT SCREEN/MOSQUITO NET

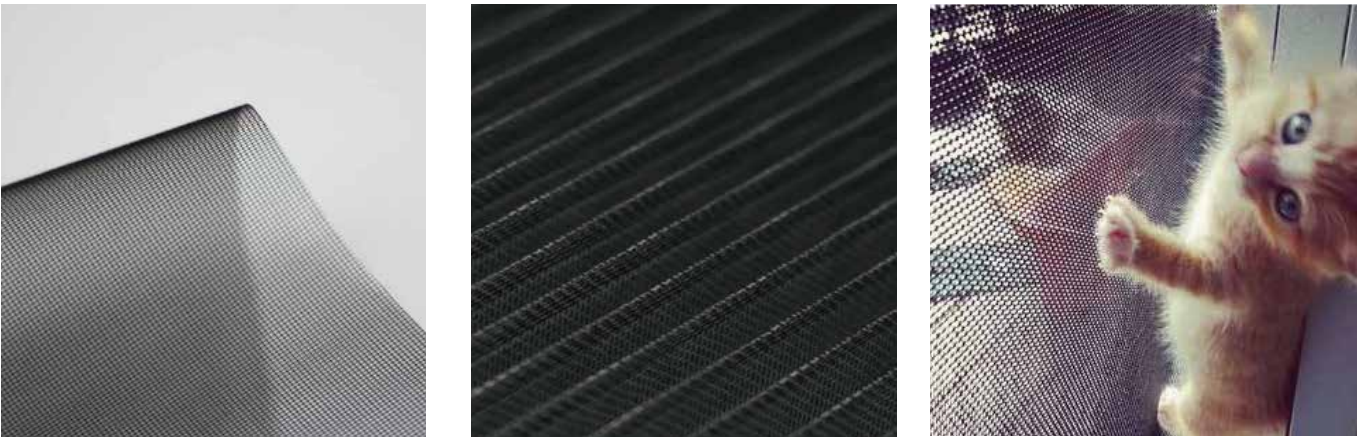

## Product introduction

Fiberglass window screen is woven by single pvc coated fiberglass, after the heat treatment, the mesh is clear and stable, and has good capacity in ventilation and transparency. It also has the capacity of weathering-resistant, burning-resistant, high intensity, no pollution, etc. It is widely used in window and garden to protect against the mosquito and other insects.


| Item No.   | Density Count/25mm |      | Area Weight(g/m2) | Tensile Strength (N/20cm) |      | Woven Structure | Color                                                       |
|------------|--------------------|------|-------------------|---------------------------|------|-----------------|-------------------------------------------------------------|
|            | Warp               | Weft |                   | Warp                      | Weft |                 |                                                             |
| GF-WS14×14 | 14                 | 14   | 85                | ≥150                      | ≥150 | Ieno            | Grey,Dark Grey, Black,White, Brown,Green, Blue (Customized) |
| GF-WS18×16 | 18                 | 16   | 115-120           | ≥180                      | ≥160 | Plain           |                                                             |
| GF-WS20×20 | 20                 | 20   | 110-115           | ≥210                      | ≥210 | Plain           |                                                             |

## Product characteristics

- Good positioning performance
- Anti-uv, environment-friendly
- Flame resistance, anti-corrosion, long service life
- High strength
- Good pervious to light

## Packaging and storage

Each roll is wrapped up in plastic film and then packed in a cardboard box. The carton are stacked horizontally onto pallets. All pallets are stretch wrapped and strapped to maintain stability during transport. Unless otherwise specified, product should be stored in a cool, dry,water-proof area It is recommended that the room temperature and humidity be always maintained at 15°C to 35°C and 35% to 65% respectively.

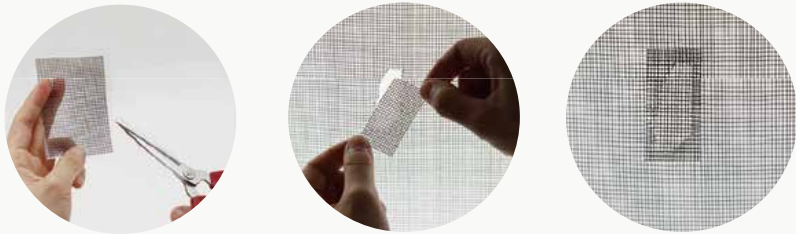

## SCREEN REPAIR TAPE

### Product introduction

The screen repair tape produced by our company is self-adhesive tape use for repair screen damaged, made of 100% standard fiberglass pvc environmentally-friendly coated screens and coated with high-quality high-permeability acrylic polymer.The whole production process by disk non-electrostatic coating, in accordance with export standard packaging, advanced technology, stable quality.

| Base Material             | Regular Size            |
|---------------------------|-------------------------|
| Fiberglass Windows Screen | 2 ″ × 80 ″ (5cm×2.03m)  |
| 18×16/inch                | 2 ″ × 200 ″ (5cm×5.08m) |
| Color                     | Black, Grey, White      |

### Product characteristics

- Super sticky
- Transparent, colorless, perfect patching
- Washable and corrosion resistant, excellent weather resistance

## SCREEN REPAIR PATCH



### Product introduction

Can be used to repair holes in screen windows, screen doors, mosquito nets, etc., to prevent mosquitoes from invading There is no need to replace the entire window screen, just stick and use, convenient and economical

### Product characteristics

- Not easy to fall off
- Super sticky, easy to use
- Can pass eu reach certification
- Customized specifications, packaging, kits, etc.

### Product introduction

The breathable window screen repair sub, which has strong adhesion and is not easy to fall off, can be used to repair holes in screen windows, screen doors, mosquito nets, etc., to prevent mosquitoes from invading, and there is no need to replace the entire screen. It also has the capacity of weathering-resistant, burning-resistant, high intensity, no pollution, etc. It is widely used in window and garden to protect against the mosquito and other insects.

CE

EN 1869 2019  
EN 1869 1997



# CONVENTIONAL FIRE BLANKET



# FIRE BLANKET



## Product introduction

A protective life-saving fire blanket shroud made of light but strong flame and heat-resistant material for a quick grab-and-wrap around use in case of fire emergencies, firefighting and rescue work operations. A fire blanket is a handy and dependable fire protection outfit for homes,business establishments and barangay centers that is supplementary or complementary to the standard fire extinguishers.

Fire blankets should always be placed near an exit so they can be easily reached in an emergency. Do not place then near to cookers or in distances far away from exits for safety reasons. If you do throw a fire blanket onto the flames and they spread for one reason or another at least you know that the exit is near to you should you need to evacuate the premises urgently.

| Item No.    | Size        | Base Cloth Weight | Base Cloth Thickness | Woven Structure | Surface     | Temperature | Color      | Packaging   |
|-------------|-------------|-------------------|----------------------|-----------------|-------------|-------------|------------|-------------|
| GF-FB-1010B | 1000x1000mm | 430g/m2           | 0.45 (mm)            | Broken Twill    | Soft/Smooth | 550°C       | White/Gold | Bag/PVC/Box |
| GF-FB-1212B | 1200x1000mm | 430g/m2           | 0.45 (mm)            | Broken Twill    | Soft/Smooth | 550°C       | White/Gold | Bag/PVC/Box |
| GF-FB-1515B | 1500x1500mm | 430g/m2           | 0.45 (mm)            | Broken Twill    | Soft/Smooth | 550°C       | White/Gold | Bag/PVC/Box |
| GF-FB-1218B | 1200x1800mm | 430g/m2           | 0.45 (mm)            | Broken Twill    | Soft/Smooth | 550°C       | White/Gold | Bag/PVC/Box |
| GF-FB-1818B | 1800x1800mm | 430g/m2           | 0.45 (mm)            | Broken Twill    | Soft/Smooth | 550°C       | White/Gold | Bag/PVC/Box |

## Product characteristics

- Excellent flame retardant property
- Easy to carry and use
- Environment frendly, cause no secondary pollution after use
- No expiry date, can be used repeately for many times if there is no damage

## Packaging and storage

Product is folded in the outer packing with the right size. Leaving 2 tapes outside the packing, easy for pulling. It out. There will be operation manual on the external packing. The external packing could be pvc bags, pvc box which can be customized According to customer s requirements.

Fireproofing blanket can be used for a long time. Without special requirements for packing, it only need to be stored in dry and cool place. The place where it is put should be easy for getting and using, it would be a good choice to put several blan-kets in which is high risk area.